

Chapter 9

Intermediate code generation

Course “Compiler Construction”

Martin Steffen

Spring 2023



Chapter 9

Learning Targets of Chapter "Intermediate code generation".

1. intermediate code
2. three-address code and P-code
3. translation to those forms
4. translation between those forms



Targets & Outline

Intro

Intermediate code

Three-address (intermediate) code

P-code

Generating P-code

Generation of three-address intermediate code

From P-code to 3A-Code and back: static simulation & macro expansion

More complex data types

Control



Chapter 9

Outline of Chapter "Intermediate code generation".

Intro

Intermediate code

Three-address (intermediate) code

P-code

Generating P-code

Generation of three-address intermediate code

From P-code to 3A-Code and back: static simulation & macro expansion

More complex data types

Control statements and logical expressions




Section

Intro

Chapter 9 “Intermediate code generation”
Course “Compiler Construction”
Martin Steffen
Spring 2023

Schematic anatomy of a compiler

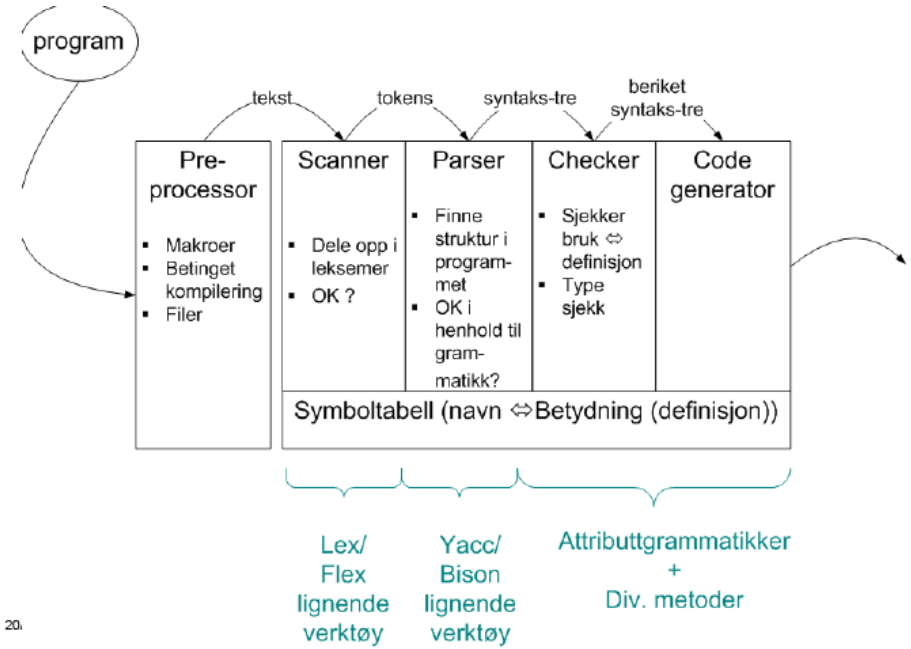

- code generator:
  - may in itself be “phased”
  - using additional intermediate representation(s) (IR) and *intermediate code*

Various forms of "executable" code

- different forms of code: relocatable vs. "absolute" code, relocatable code from libraries, assembler, etc.
- often: specific file extensions
  - Unix/Linux etc.
    - asm: `*.s`
    - rel: `*.o`
    - rel. from library: `*.a`
    - abs: files without file extension (but set as executable)
  - Windows:
    - abs: `*.exe`[1]
- *byte code* (specifically in Java)
  - a form of intermediate code, as well
  - executable on the JVM
  - in .NET/C♯: *CIL*
    - also called byte-code, but compiled further

[1] `.exe`-files include more, and "assembly" in .NET even more



Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types
Control

Generating code: compilation to machine code

- 3 main forms or variations:
  1. machine code in textual assembly format (assembler can "compile" it to 2. and 3.)
  2. relocatable format (further processed by *loader*)
  3. binary machine code (directly executable)
- seen as different representations, but otherwise equivalent
- in practice: for *portability*
  - as another intermediate code: "platform independent" *abstract machine code* possible.
  - capture features shared roughly by many platforms
    - e.g. there are *stack frames*, static links, and push and pop, but *exact* layout of the frames is platform dependent
  - platform dependent details:
    - platform dependent code
    - filling in call-sequence / linking conventions

  done in a last step



Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types
Control

Byte code generation

- semi-compiled well-defined format
- platform-independent
- further away from any HW, quite more high-level
- for example: Java byte code (or CIL for .NET and C♯)
  - can be interpreted, but often compiled further to machine code ("just-in-time compiler" JIT)
- executed (interpreted) on a "virtual machine" (like JVM)
- often: *stack-oriented* execution code (in post-fix format)
- also *internal* intermediate code (in compiled languages) may have stack-oriented format ("P-code")



Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types
Control



Section

Intermediate code

Chapter 9 “Intermediate code generation”
Course “Compiler Construction”
Martin Steffen
Spring 2023


Use of intermediate code

- two kinds of IC covered
  1. three-address code (3AC, 3AIC)
     - generic (platform-independent) abstract machine code
     - new names for all intermediate results
     - can be seen as unbounded pool of maschine registers
     - advantages (portability, optimization . . .)
  2. P-code ("Pascal-code", cf. Java "byte code")
     - originally proposed for interpretation
     - now often translated before execution (cf. JIT-compilation)
     - intermediate results in a *stack* (with postfix operations)
- *many* variations and elaborations for both kinds
  - addresses represented *symbolically* or as *numbers* (or both)
  - granularity/"instruction set"/level of abstraction: high-level op's available e.g., for array-access or: translation in more elementary op's needed.
  - operands (still) typed or not
  - . . .



Various translations in the lecture

- AST here: tree structure *after* semantic analysis, let's call it AST$^+$ or just simply AST.
- translation AST $\Rightarrow$ P-code: appox. as in oblig 2
- we touch upon general problems/techniques in "translations"
- one (important) aspect inored for now: *register allocation*

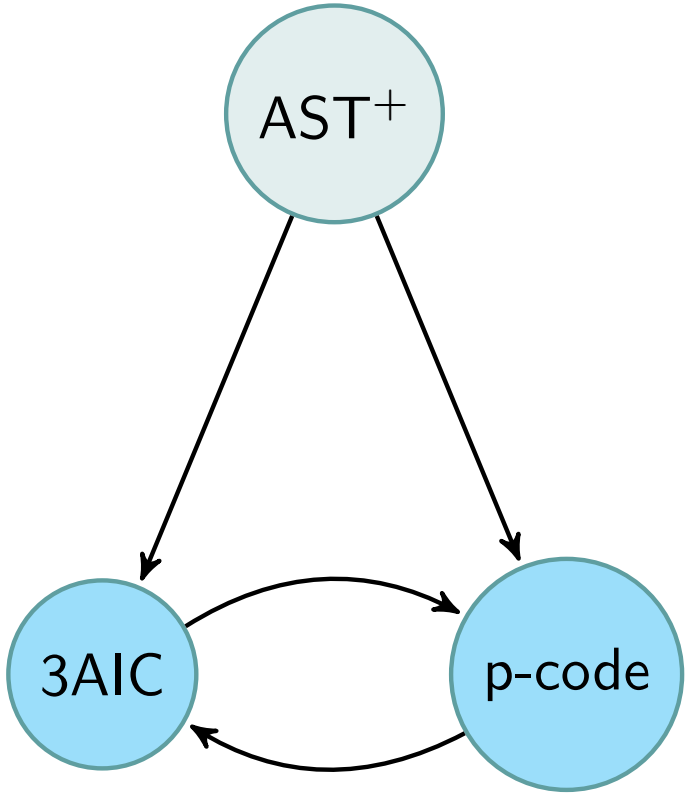



Section

Three-address (intermediate) code

Chapter 9 “Intermediate code generation”
Course “Compiler Construction”
Martin Steffen
Spring 2023

Three-address code

- common (form of) IR

TA: Basic format

$$x = y \ \mathbf{op} \ z \tag{1}$$


- x, y, z: names, constants, temporaries ...
- some operations need fewer arguments

- example of a (common) linear IR
- *linear* IR: ops include *control-flow* instructions (like jumps)
- alternative linear IRs (on a similar level of abstraction): 1-address (or even 0) code (stack-machine code), 2 address code
- well-suited for optimizations
- modern architectures often have 3-address code like instruction sets (RISC-architectures)



3AC example (expression)

2*a+(b-3)

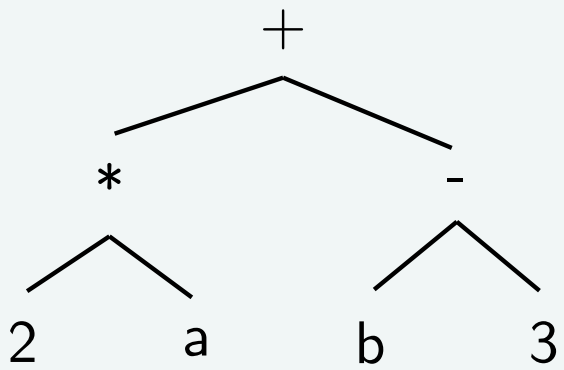

Three-address code

```
t1 = 2 * a
t2 = b - 3
t3 = t1 + t2
```

alternative sequence

```
t1 = b - 3
t2 = 2 * a
t3 = t2 + t1
```

3AIC instruction set

- basic format: $x = y \, \mathbf{op} \, z$
- but also:
  - $x = \mathbf{op} \, z$
  - $x = y$
- *operators*: +,-,*,/, <, >, `and`, `or`
- `read` x, `write` x
- `label` L (sometimes called a "pseudo-instruction")
- conditional jumps: `if_false` x `goto` L
- t_1, t_2, t_3 .... (or `t1, t2, t3, ...`): temporaries (or temporary variables)
  - assumed: *unbounded* reservoir of those
  - note: "non-destructive" assignments (single-assignment)



Illustration: translation to 3AIC

Source

```
read x;      // input an integer
if  0<x then
  fact := 1;
  repeat
    fact := fact * x;
    x := x -1
  until x = 0;
  write fact // output: factorial of x
end
```

Target: 3AIC

```
read x
t1 = x > 0
if_false t1 goto L1
fact = 1
label L2
t2 = fact * x
fact = t2
t3 = x - 1
x = t3
t4 = x == 0
if_false t4 goto L2
write fact
label L1
halt
```



Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types
Control

Variations in the design of 3A-code

- provide operators for `int`, `long`, `float` ....?
- how to represent program *variables*
  - names/symbols
  - pointers to the declaration in the symbol table?
  - (abstract) machine address?
- how to store/represent 3A *instructions*?
  - quadruples: 3 "addresses" + the op
  - *triple* possible (if target-address (left-hand side) is always a *new temporary*)



Quadruple-representation for 3AIC (in C)

```
typedef enum {rd,gr,if_f,asn,lab,mul,
              sub, eq, wri, halt, ... } OpKind;
typedef enum {Empty, IntConst, String } AddrKind;

typedef struct  {
  AddrKind kind;
  union {
    int val;
    char * name;
  } contents;
}  Address;

typedef struct {
  OpKind op;
  Address addr1, addr2, addr3;
} Quad
```



Targets & Outline

Intro

Intermediate code

Three-address (intermediate) code

P-code

Generating P-code

Generation of three-address intermediate code

From P-code to 3A-Code and back: static simulation & macro expansion

More complex data types

Control



Section

P-code

Chapter 9 “Intermediate code generation”
Course “Compiler Construction”
Martin Steffen
Spring 2023

P-code

- different common intermediate code / IR
- aka "one-address code"[2] or stack-machine code
- used prominently for Pascal
- remember: post-fix printing of syntax trees (for expressions) and "reverse polish notation"

[2] There's also two-address codes, but those have fallen more or less in disuse for intermediate code.



Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types
Control

Example: expression evaluation 2*a+(b-3)

```
ldc 2   ; load constant 2
lod a   ; load value of variable a
mpi     ; integer multiplication
lod b   ; load value of variable b
ldc 3   ; load constant 3
sbi     ; integer substraction
adi     ; integer addition
```



Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types
Control

P-code for assignments: `x := y + 1`



- assignments:
  - variables left and right: *L-values* and *R-values*
  - cf. also the values $\leftrightarrow$ references/addresses/pointers

```
lda x       ; load address of x
lod y       ; load value of y
ldc 1       ; load constant 1
adi         ; add
sto         ; store top to address
            ; below top & pop both
```

Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types
Control

P-code of the factorial function

```
read x;      // input an integer
if  0<x then
  fact := 1;
  repeat
    fact := fact * x;
    x := x -1
  until x = 0;
  write fact // output: factorial of x
end
```

```
1  lda x        ; load address of x
   rdi          ; read an integer, store to
                ; address on top of stack (& pop it)
2  lod x        ; load the value of x
   ldc 0        ; load constant 0
   grt          ; pop and compare top two values
                ; push Boolean result
   fjp L1       ; pop Boolean value, jump to L1 if false
3  lda fact     ; load address of fact
   ldc 1        ; load constant 1
   sto          ; pop two values, storing first to
                ; address represented by second
4  lab L2       ; definition of label L2
5  lda fact     ; load address of fact
   lod fact     ; load value of fact
   lod x        ; load value of x
   mpi          ; multiply
   sto          ; store top to address of second & pop
6  lda x        ; load address of x
   lod x        ; load value of x
   ldc 1        ; load constant 1
   sbi          ; subtract
   sto          ; store (as before)
7  lod x        ; load value of x
   ldc 0        ; load constant 0
   equ          ; test for equality
   fjp L2       ; jump to L2 if false
8  lod fact     ; load value of fact
   wri          ; write top of stack & pop
   lab L1       ; definition of label L1
9  stp
```





Section

Generating P-code

Chapter 9 “Intermediate code generation”
Course “Compiler Construction”
Martin Steffen
Spring 2023


Assignment grammar



Grammar

$$
\begin{array}{rcl}
exp_1 & \rightarrow & \mathbf{id} := exp_2 \\
exp & \rightarrow & aexp \\
aexp & \rightarrow & aexp_2 + factor \\
aexp & \rightarrow & factor \\
factor & \rightarrow & (\ exp\ ) \\
factor & \rightarrow & \mathbf{num} \\
factor & \rightarrow & \mathbf{id}
\end{array}
$$

`(x:=x+3)+4`

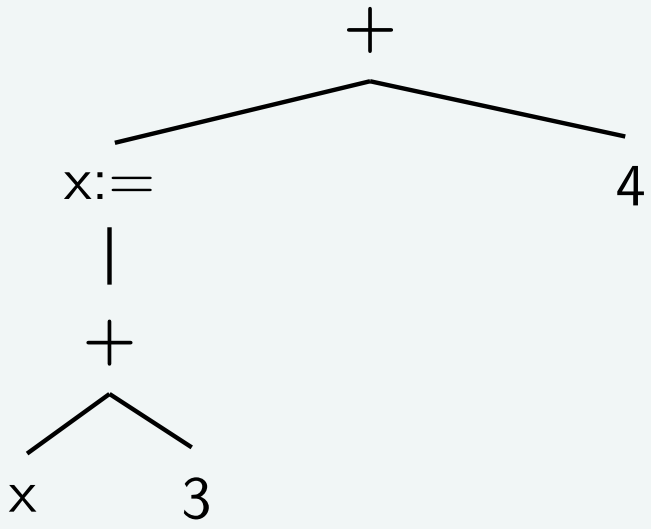

Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types
Control

Generating p-code with A-grammars

- goal: p-code as *attribute* of the grammar symbols/nodes of the syntax trees
- *syntax-directed translation*
- technical task: turn the syntax tree into a *linear* IR (here P-code)

$\Rightarrow$
  - "linearization" of the syntactic tree structure
  - while translating the nodes of the tree (the syntactical sub-expressions) one-by-one

- not recommended at any rate (for modern/reasonably complex language): code generation *while* parsing[3]

[3] One can use the a-grammar formalism also to describe the treatment of ASTs, not concrete syntax trees/parse trees.



Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types
Control

A-grammar for statements/expressions

- focus here on expressions/assignments: leaving out certain complications
- in particular: control-flow complications
  - two-armed conditionals
  - loops, etc.
- also: code-generation "intra-procedural" only, rest is filled in as *call-sequences*
- A-grammar for intermediate code-gen:
  - rather simple and straightforwad
  - only 1 *synthesized* attribute: `pcode`




A-grammar

- "string" concatenation: ++ (construct separate instructions) and ^ (concat one instruction)

productions/grammar rules			semantic rules
exp_1	$\rightarrow$	$\mathbf{id} := exp_2$	exp_1 .pcode = "**lda**"^**id**.strval ++ exp_2 .pcode ++ "**stn**"
exp	$\rightarrow$	$aexp$	exp .pcode = $aexp$ .pcode
$aexp_1$	$\rightarrow$	$aexp_2 + factor$	$aexp_1$ .pcode = $aexp_2$ .pcode ++ $factor$ .pcode ++ "**adi**"
$aexp$	$\rightarrow$	$factor$	$aexp$ .pcode = $factor$ .pcode
$factor$	$\rightarrow$	(exp)	$factor$ .pcode = exp .pcode
$factor$	$\rightarrow$	**num**	$factor$ .pcode = "**ldc**"^**num**.strval
$factor$	$\rightarrow$	**id**	$factor$ .pcode = "**lod**"^**num**.strval

(x := x + 3) + 4

Attributed tree

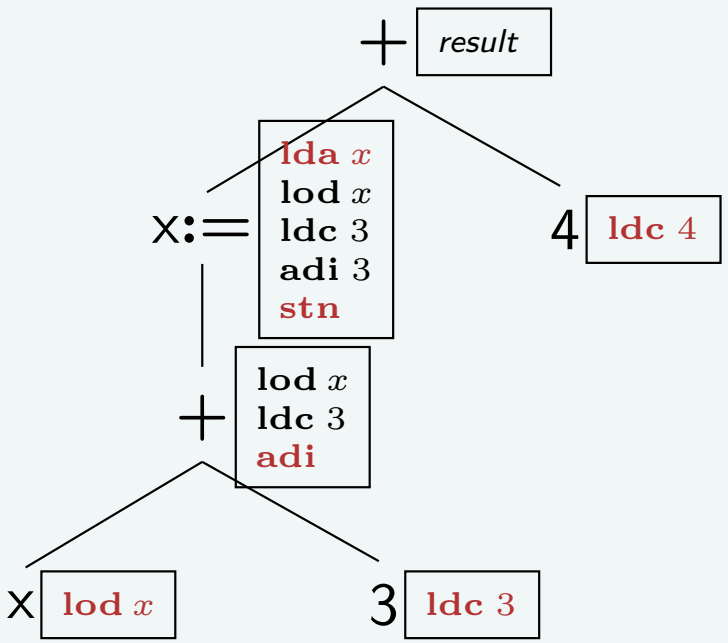

"result" attr.

```
lda  x
lod  x
ldc  3
adi
stn
ldc  4
adi      ;   +
```

- note: here `x:=x+3` has a side-effect *and "return" value* (as in C . . .):
- **stn** ("store non-destructively")
  - similar to **sto** , but *non-destructive*
    1. take top element, store it at address represented by 2nd top
    2. discard address, but not the top-value



Overview: p-code data structures

```
type symbol = string

type expr =
    | Var of symbol
    | Num  of int
    | Plus of expr * expr
    | Assign of symbol * expr
```

```
type instr   =
(* p-code instructions *)
     LDC of int
   | LOD of symbol
   | LDA of symbol
   | ADI
   | STN
   | STO


type tree = Oneline of instr
   | Seq of tree * tree

type program = instr list
```

- symbols:
  - here: strings for *simplicity*
  - concretely, symbol table may be involved, or variable names already resolved in addresses etc.



Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types
Control

Two-stage translation

```
val to_tree: Astexprassign.expr -> Pcode.tree

val linearize: Pcode.tree ->  Pcode.program

val to_program: Astexprassign.expr -> Pcode.program
```

```
let rec to_tree (e: expr) =
  match e with
  | Var s -> (Oneline (LOD s))
  | Num n  -> (Oneline (LDC n))
  | Plus (e1,e2) ->
      Seq (to_tree e1 ,
           Seq(to_tree e2, Oneline ADI))
  | Assign (x, e) ->
      Seq (Oneline (LDA x),
           Seq( to_tree e, Oneline STN))

let rec linearize (t: tree) : program =
  match t with
    Oneline i -> [i]
  | Seq (t1, t2) -> (linearize t1) @ (linearize t2);; (* list concat *)

let to_program e = linearize (to_tree e);;
```



Targets & Outline

Intro

Intermediate code

Three-address (intermediate) code

P-code

Generating P-code

Generation of three-address intermediate code

From P-code to 3A-Code and back: static simulation & macro expansion

More complex data types

Control

Source language AST data in C

```
typedef enum {Plus, Assign} Optype;
typedef enum {OpKind, ConstKind, IdKind} NodeKind;
typedef struct streenode {
  NodeKind kind;
  Optype op;          /* used with OpKind */
  struct streenode *lchild, *rchild;
  int val             /* used with ConstKind */
  char * strval       /* used for identifiers and numbers */
} STreenode;
typedef STreenode *SyntaxTree;
```



Targets & Outline

Intro

Intermediate code

Three-address (intermediate) code

P-code

Generating P-code

Generation of three-address intermediate code

From P-code to 3A-Code and back: static simulation & macro expansion

More complex data types

Control

Code-generation via tree traversal (schematic)

```
procedure genCode(T: treenode)
begin
 if   T ≠ nil
 then
  ``generate code to prepare for code for  left child''  // prefix
  genCode (left child of T);  // prefix ops
  ``generate code to prepare for code for right child''  //infix
   genCode (right child of T); // infix ops
  ``generate code to implement action(s) for T''  //postfix
end;
```



Targets & Outline

Intro

Intermediate code

Three-address (intermediate) code

P-code

Generating P-code


Generation of three-address intermediate code

From P-code to 3A-Code and back: static simulation & macro expansion

More complex data types

Code generation from AST$^+$

- main "challenge": linearization
- here: relatively simple
- no control-flow constructs
- linearization here (see a-grammar):
  - string of p-code
  - not necessarily the ultimate choice (p-code might still need translation to "real" executable code)

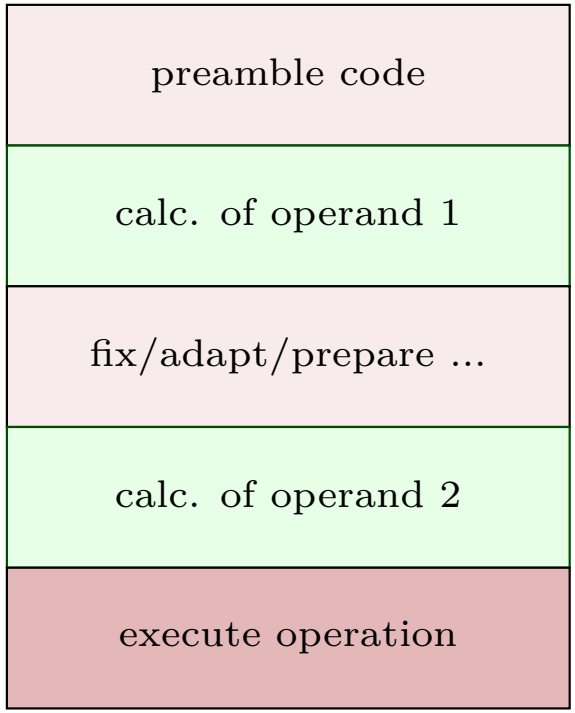



Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types
Control

Code generation

```
void genCode( SyntaxTree t)
{ char codestr[CODESIZE];
  /* CODESIZE = max length of 1 line o
  if (t != NULL)
  { switch (t->kind)
    { case OpKind:
        switch (t->op)
        { case Plus:
            genCode(t->lchild);   ← rek.kall
            genCode(t->rchild);   ← rek.kall
            emitCode("adi");
            break;
```

```
all
all
        case Assign:
          sprintf(codestr,"%s %s",
                          "lda",t->strval);
          emitCode(codestr);
          genCode(t->lchild);   ← rek.kall
          emitCode("stn");
          break;
        default:
          emitCode("Error");
          break;
      }
      break;
    case ConstKind:
      sprintf(codestr,"%s %s","ldc",t->strval);
      emitCode(codestr);
      break;
    case IdKind:
      sprintf(codestr,"%s %s","lod",t->strval);
      emitCode(codestr);
      break;
    default:
      emitCode("Error");
      break;
  }
}
}
```



Targets & Outline

Intro

Intermediate code

Three-address (intermediate) code

P-code

Generating P-code

Generation of three-address intermediate code

From P-code to 3A-Code and back: static simulation & macro expansion

More complex data types

Control



Section

Generation of three-address intermediate code

Chapter 9 “Intermediate code generation”
Course “Compiler Construction”
Martin Steffen
Spring 2023

3AIC manual translation again



Source

```
read x;      // input an integer
if  0<x then
  fact := 1;
  repeat
    fact := fact * x;
    x := x -1
  until x = 0;
  write fact // output: factorial of x
end
```

Target: 3AIC

```
read x
t1 = x > 0
if_false t1 goto L1
fact = 1
label L2
t2 = fact * x
fact = t2
t3 = x - 1
x = t3
t4 = x == 0
if_false t4 goto L2
write fact
label L1
halt
```

Targets & Outline

Intro

Intermediate code

Three-address (intermediate) code

P-code

Generating P-code

Generation of three-address intermediate code

From P-code to 3A-Code and back: static simulation & macro expansion

More complex data types

Control

Three-address code data structures (some)

```
type symbol = string

type expr =
  | Var of symbol
  | Num  of int
  | Plus of expr * expr
  | Assign of symbol * expr
```

```
type mem =
    Var of symbol
  | Temp of symbol
  | Addr of symbol   (* &x *)

type operand = Const of int
  | Mem  of mem

type cond = Bool of operand
  | Not of operand
  | Eq of operand * operand
  | Leq of operand * operand
  | Le of operand * operand

type rhs = Plus of operand * operand
  | Times of operand * operand
  | Id of operand

type instr =
    Read of symbol
  | Write of symbol
  | Lab of symbol
(* pseudo instruction *)
  | Assign of symbol * rhs
  | AssignRI of operand * operand * operand
(* a    := b[i] *)
  | AssignLI of operand * operand * operand
(* a[i] := b *)
  | BranchComp  of cond * label
  | Halt
  | Nop

type tree = Oneline of instr
```

Translation to three-address code

```
let rec to_tree (e: expr) : tree * temp =
  match e with
    Var s ->  (Oneline Nop, s)
  | Num i ->  (Oneline Nop, string_of_int i)
  | Ast.Plus (e1,e2) ->
      (match (to_tree e1, to_tree e2) with
        ((c1,t1), (c2,t2)) ->
          let t = newtemp() in
          (Seq(Seq(c1,c2),
               Oneline (
               Assign (t,
                       Plus(Mem(Temp(t1)),Mem(Temp(t2))))))),
           t))
  | Ast.Assign (s',e') ->
      let (c,t2) = to_tree(e')
      in  (Seq(c,
               Oneline (Assign(s',
                               Id(Mem(Temp(t2)))))),
           t2)
```

Three-address code by synthesized attributes

- similar to the representation for p-code
- again: purely synthesized
- semantics of executing expressions/assignments[4]
  - side-effect plus also
  - **value**
- *two* attributes (before: only 1)
  - `tacode`: instructions (as before, as string), potentially empty
  - `name`: "name" of variable or tempary, where result resides[5]
- evaluation of expressions: *left-to-right* (as before)

[4] That's one possibility of a semantics of assignments (C, Java).

[5] In the p-code, the result of evaluating expression (also assignments) ends up in the stack (at the top). Thus, one does not need to capture it in an attribute.



A-grammar

productions/grammar rules			semantic rules		
exp_1	$\rightarrow$	$\mathbf{id} = exp_2$	exp_1 .name	$=$	exp_2 .name
			exp_1 .tacode	$=$	exp_2 .tacode ++ $\mathbf{id}$.strval ^ "=" ^ exp_2 .name
exp	$\rightarrow$	$aexp$	exp .name	$=$	$aexp$ .name
			exp .tacode	$=$	$aexp$ .tacode
$aexp_1$	$\rightarrow$	$aexp_2 + factor$	$aexp_1$ .name	$=$	$newtemp()$
			$aexp_1$ .tacode	$=$	$aexp_2$ .tacode ++ $factor$ .tacode + $aexp_1$ .name ^ "=" ^ $aexp_2$ .name ^ "+" ^ $factor$ .name
$aexp$	$\rightarrow$	$factor$	$aexp$ .name	$=$	$factor$ .name
			$aexp$ .tacode	$=$	$factor$ .tacode
$factor$	$\rightarrow$	(exp)	$factor$ .name	$=$	exp .name
			$factor$ .tacode	$=$	exp .tacode
$factor$	$\rightarrow$	$\mathbf{num}$	$factor$ .name	$=$	$\mathbf{num}$.strval
			$factor$ .tacode	$=$	""
$factor$	$\rightarrow$	$\mathbf{id}$	$factor$ .name	$=$	$\mathbf{num}$.strval
			$factor$ .tacode	$=$	""

Another sketch of 3AI-code generation

- "return" of the two attributes
  - name of the variable (a *temporary*): officially returned
  - the code: via *emit*
- note: *postfix* emission only (in the shown cases)

Generating code as AST methods

- possible: add `genCode` as *method* to the nodes of the AST
- e.g.: define an abstract method `String genCodeTA()` in the `Exp` class (or `Node`, in general all AST nodes where needed)

```
String genCodeTA() { String s1,s2; String t = NewTemp();
  s1 = left.GenCodeTA();
  s2 = right.GenCodeTA();
  emit (t + "="  + s1 + op + s2);
  return t
}
```



Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types
Control

Translation to three-address code (from before)

```
let rec to_tree (e: expr) : tree * temp =
  match e with
    Var s ->  (Oneline Nop, s)
  | Num i ->  (Oneline Nop, string_of_int i)
  | Ast.Plus (e1,e2) ->
      (match (to_tree e1, to_tree e2) with
        ((c1,t1), (c2,t2)) ->
          let t = newtemp() in
          (Seq(Seq(c1,c2),
                Oneline (
                Assign (t,
                        Plus(Mem(Temp(t1)),Mem(Temp(t2))))),
           t))
  | Ast.Assign (s',e') ->
      let (c,t2) = to_tree(e')
      in  (Seq(c,
                Oneline (Assign(s',
                                Id(Mem(Temp(t2))))),
           t2)
```



Targets & Outline

Intro

Intermediate code

Three-address (intermediate) code

P-code


Generating P-code, Generation of three-address intermediate code

From P-code to 3A-Code and back: static simulation & macro expansion

More complex data types

Control

Attributed tree (x:=x+3) + 4

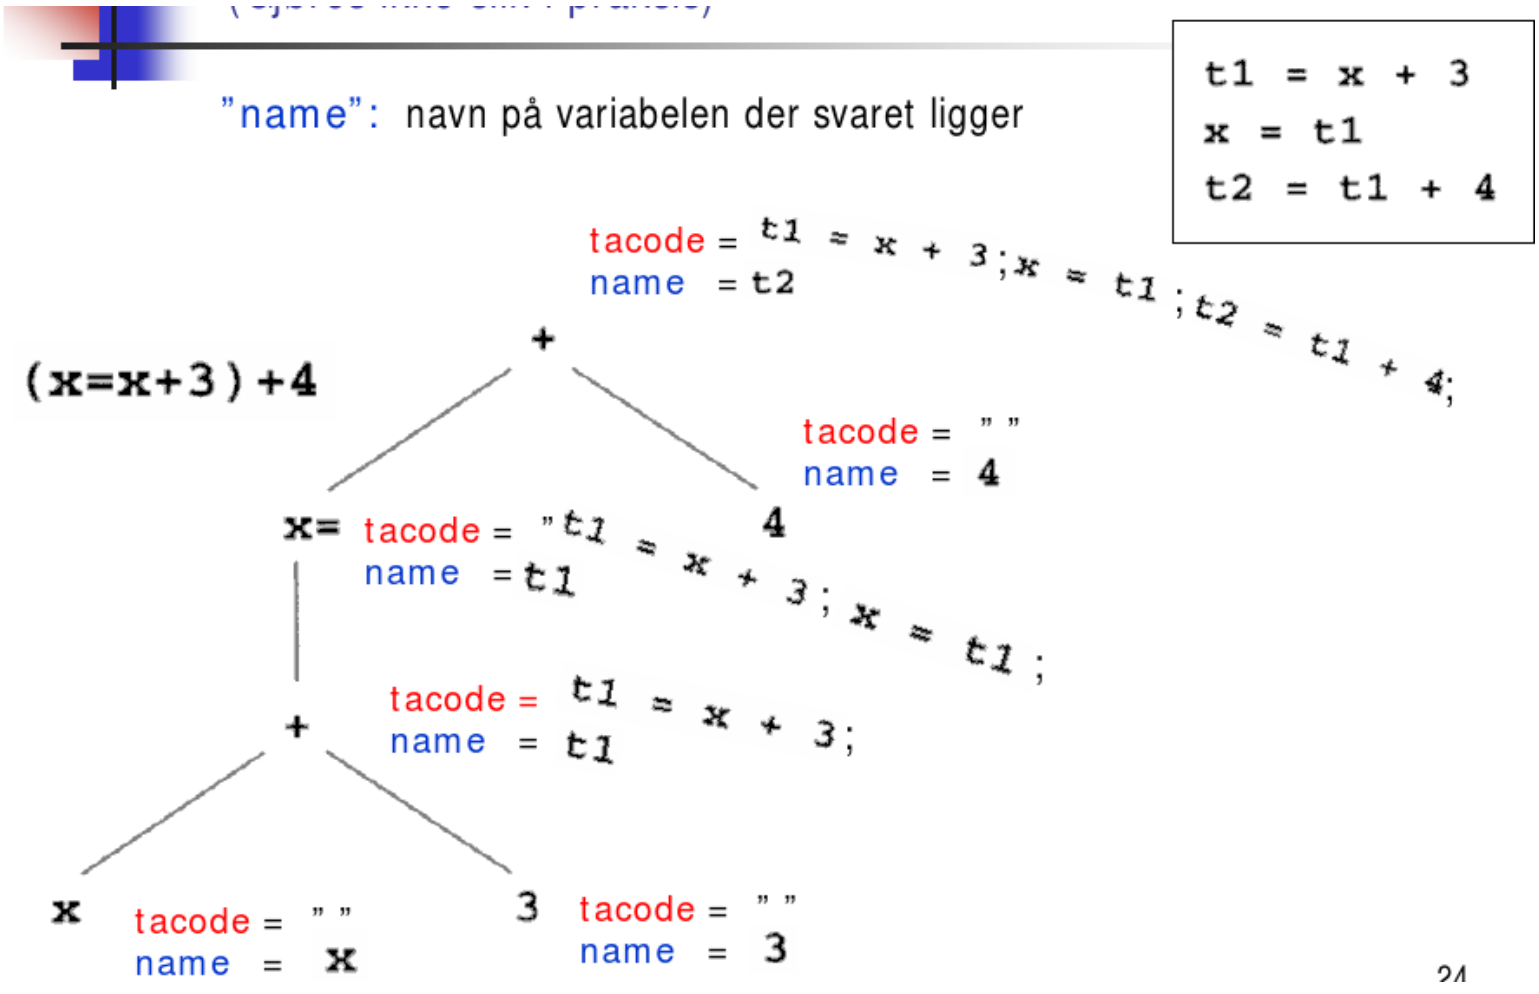

- note: room for optimization



Section

From P-code to 3A-Code and back: static simulation & macro expansion

Chapter 9 “Intermediate code generation”
Course “Compiler Construction”
Martin Steffen
Spring 2023

"Static simulation"

- *illustrated* by transforming p-code ⇒ 3AC
- restricted setting: straight-line code
- cf. also *basic blocks* (or elementary blocks)
  - code without branching or other control-flow complications (jumps/conditional jumps. . .)
  - often considered as basic building block for static/semantic analyses,
  - e.g. basic blocks as nodes in *control-flow graphs*, the "non-semicolon" control flow constructs result in the edges
- terminology: static simulation seems not widely established
- cf. *abstract interpretation*, *symbolic execution*, etc.



P-code ⇒ 3AIC via "static simulation"

- difference:
  - p-code operates on the *stack*
  - leaves the needed "temporary memory" implicit
- given the (straight-line) p-code:
  - traverse the code = list of instructions from beginning to end
  - seen as "simulation"
    - conceptually at least, but also
    - concretely: the translation can make *use* of an actual stack



From P-code ⇒ 3AIC: illustration


(x=x+3)+4

P-kode:

```
lda x
lod x
ldc 3
adi
stn
ldc 4
adi
```

Ønskemål:

```
t1 = x + 3
x = t1
t2 = t1 + 4
```

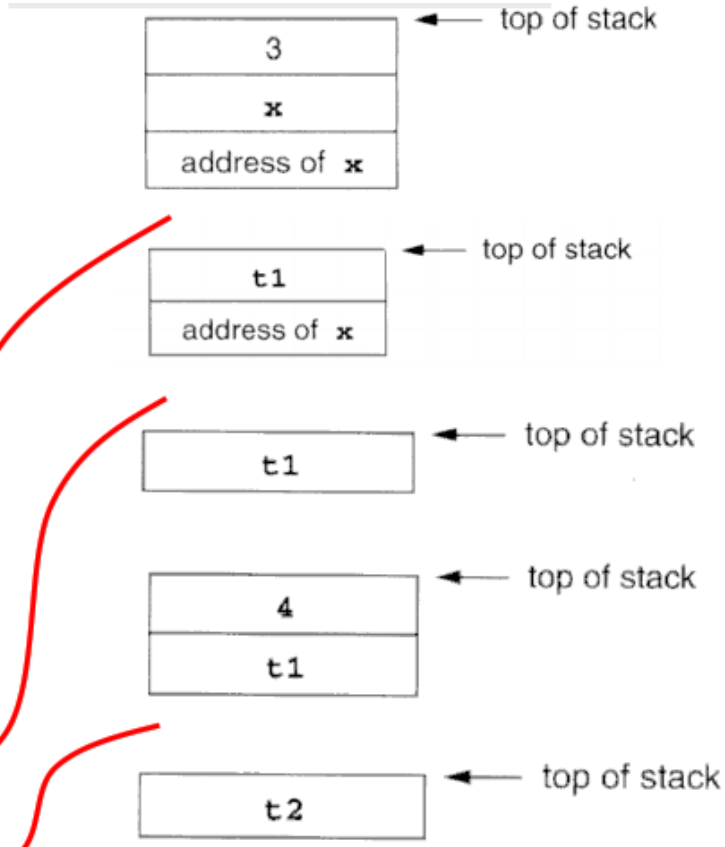

Som vi ser: Vi får den kode-sekvensen vi ønsket oss!



Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types
Control

P-code ⇐ 3AIC: macro expansion

- also here: simplification, illustrating the general technique, only

Macro for general 3AIC instruction: `a := b + c`

```
lda a
lod b;    or ``ldc b'' if b is a const
lod c:    or ``ldc c'' if c is a const
adi
sto
```



Example: P-code ⇐ 3AIC ((x:=x+3)+4)

source 3AI-code

```
t1 = x + 3
x  = t1
t2 = t1 + 4
```

Direct p-code

```
lda x
lod x
ldc 3
adi
stn
ldc 4
adi     ;  +
```

P-code via 3A-code by macro exp.

```
;---  t1 = x + 3
lda t1
lod x
ldc 3
adi
sto
;---  x = t1
lda x
lod t1
sto
;---  t2 = t1 + 4
lda t2
lod t1
ldc 4
adi
sto
```

cf. indirect 13 instructions vs. direct: 7 instructions



Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types
Control

Indirect code gen: source code ⇒ 3AIC ⇒ p-code

- as seen: *detour* via 3AIC leads to sub-optimal results (code size, also efficiency)
- basic deficiency: too many *temporaries*, memory traffic etc.
- several possibilities
  - avoid it altogether, of course (but remember JIT in Java)
  - chance for *code optimization* phase
  - here: more clever "macro expansion" (but sketch only)

  the more clever macro expansion: some form of *static simulation* again
- don't macro-expand the linear 3AIC
  - brainlessly into another *linear* structure (p-code), but
  - "statically simulate" it into a more *fancy* structure (a *tree*)




“Static simulation” into tree form (sketch)

- more fancy form of “static simulation” of 3AIC
- *result*: tree labelled with
  - operator, together with
  - variables/temporaries containing the results

Source

```
t1 = x + 3
x  = t1
t2 = t1 + 4
```

Tree

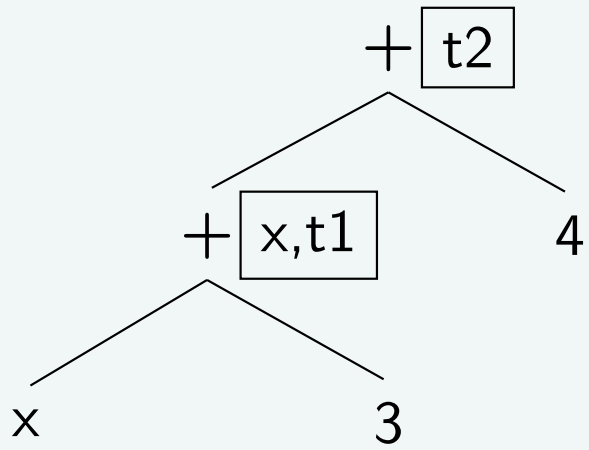


note: instruction `x = t1` from 3AIC: does *not* lead to more nodes in the tree



P-code generation from the generated tree

Tree from 3AIC

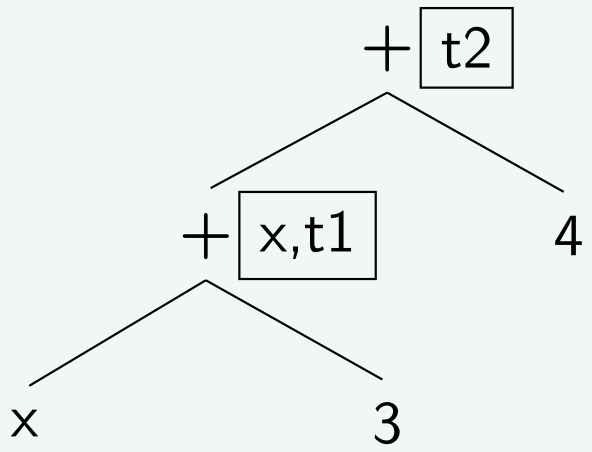

Direct code = indirect code

```
lda  x
lod  x
ldc  3
adi
stn
ldc  4
adi      ;   +
```

- with the thusly (re-)constructed tree

⇒ p-code generation


  - as before done for the AST
  - remember: code as synthesized attributes

- the "trick": reconstruct essential syntactic tree structure (via "static simulation") from the 3AI-code
- Cf. the macro expanded code: additional "memory traffic" (e.g. temp. t_1)



Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types
Control

Compare: AST (with direct p-code attributes)

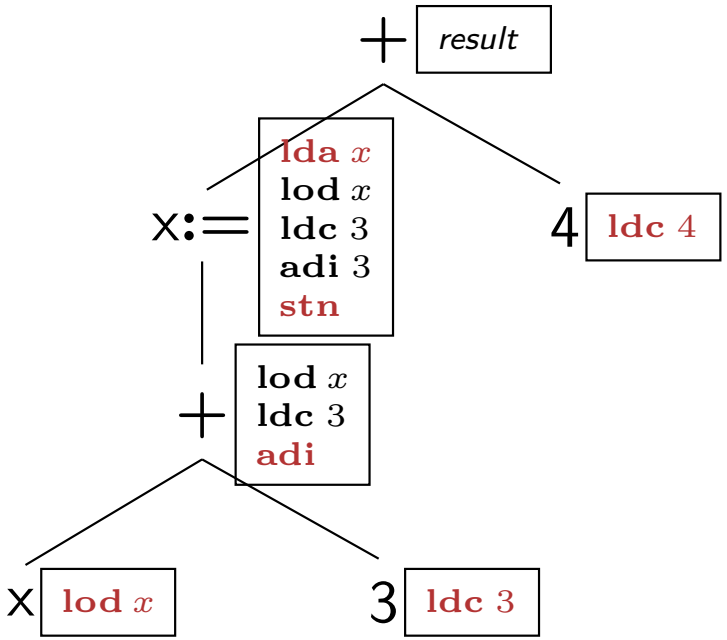



Section

More complex data types

Chapter 9 “Intermediate code generation”
Course “Compiler Construction”
Martin Steffen
Spring 2023

Status update: code generation

- so far: a number of simplifications
- data types:
  - integer constants only
  - no complex types (arrays, records, references, etc.)
- control flow
  - only expressions and
  - sequential composition

  $\Rightarrow$ straight-line code



Address modes and address calculations

- so far
  - just standard "variables" (l-variables and r-variables) and temporaries, as in `x = x + 1`
  - variables referred to by their *names* (symbols)
- but in the end: variables are represented by *addresses*
- more complex *address calculations* needed

addressing modes in 3AIC:

- `&x`: *address* of `x` (not for temporaries!)
- `*t`: *indirectly* via `t`

addressing modes in P-code


- `ind i`: *indirect load*
- `ixa a`: *indexed address*



Address calculations in 3AIC: `x[10] = 2`

- notationally represented as in C
- "pointer arithmetic" and address calculation with the available numerical operations

```
t1   = &x + 10
*t1  = 2
```

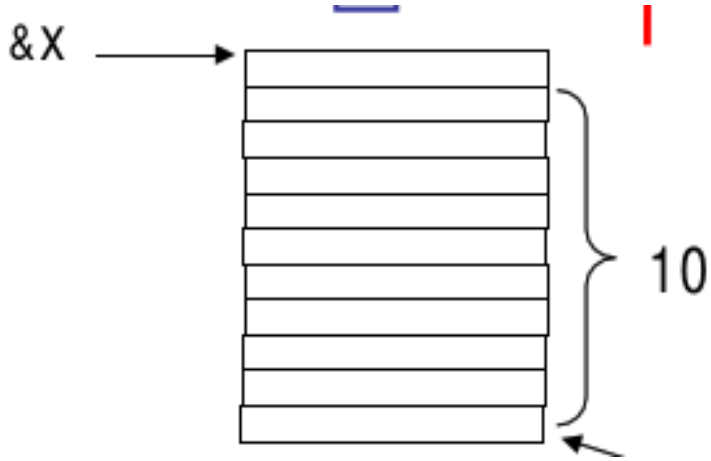


- 3-address-code data structure (e.g., quadrupel): *extended* (adding address mode)




Address calculations in P-code: `x[10] = 2`

- tailor-made commands for address calculation

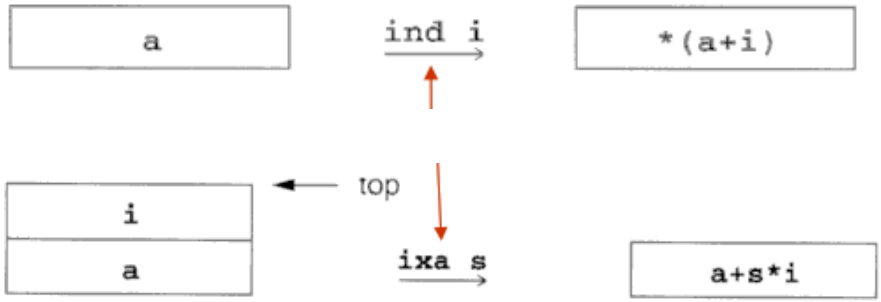

- `ixa i`: integer *scale* factor (here factor 1)

```
lda  x
ldc  10
ixa  1     // factor 1
ldc  2
sto
```

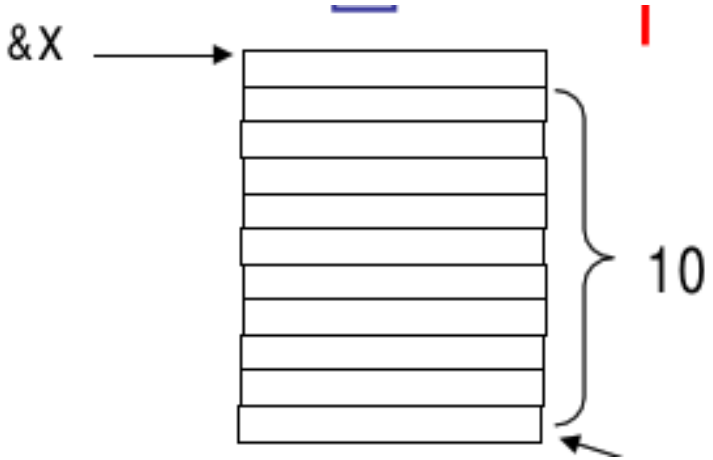

Array references and address calculations

```
int a[SIZE]; int i,j;
a[i+1] = a[j*2] + 3;
```

- difference between left-hand use and right-hand use
- arrays: stored sequentially, starting at *base address*
- offset, calculated with a *scale factor* (dep. on size/type of elements)
- for example: for `a[i+1]` (with C-style array implementation)[6]

```
a + (i+1) * sizeof(int)
```

- `a` here *directly* stands for the base address

[6] In C, arrays start at a 0-offset as the first array index is 0. Details may differ in other languages.



Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types
Control

Array accesses in 3AI code

- *one* possible way: assume 2 additional 3AIC instructions
- remember: 3AIC can be seen as *intermediate code*, not as instruction set of a particular HW!
- 2 new instructions[7]

```
t2 = a[t1] ; fetch value of array element

a[t2] = t1 ; assign to the address of an array element
```

```
a[i+1] = a[j*2] + 3;
```

```
t1     = j * 2
t2     = a[t1]
t3     = t2 + 3
t4     = i + 1
a[t4] = t3
```

[7] Still in 3AIC format. Apart from the "readable" notation, it's just two op-codes, say =[] and []=.



Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types
Control

Or "expanded": array accesses in 3AI code (2)

Expanding `t2=a[t1]`

```
t3 = t1 * elem_size(a)
t4 = &a + t3
t2 = *t4
```

Expanding `a[t2]=t1`

```
t3  = t2 * elem_size(a)
t4  = &a + t3
*t4 = t1
```

- "expanded" result for `a[i+1] = a[j*2] + 3`

```
t1  = j * 2
t2  = t1 * elem_size(a)
t3  = &a + t2
t4  = *t3
t5  = t4 +3
t6  = i + 1
t7  = t6 * elem_size(a)
t8  = &a + t7
*t8 = t5
```



Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types
Control

Array accessses in P-code

Expanding `t2=a[t1]`

```
lda  t2
lda  a
lod  t1
ixa  elem_size(a)
ind  0
sto
```

Expanding `a[t2]=t1`

```
lda  a
lod  t2
ixa  elem_size(a)
lod  t1
sto
```

- "expanded" result for `a[i+1] = a[j*2] + 3`

```
lda  a
lod  i
ldc  1
adi
ixa  elem_size(a)
lda  a
lod  j
ldc  2
mpi
ixa  elem_size(a)
ind  0
ldc  3
adi
sto
```



Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types
Control

Extending grammar & data structures




- extending the previous grammar

$$
\begin{array}{rcl}
exp & \rightarrow & subs = exp_2 \mid aexp \\
aexp & \rightarrow & aexp + factor \mid factor \\
factor & \rightarrow & (\ exp\ ) \mid \mathbf{num} \mid subs \\
subs & \rightarrow & \mathbf{id} \mid \mathbf{id}\,[\ exp\ ]
\end{array}
$$

Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types
Control

Syntax tree for `(a[i+1]:=2)+a[j]`

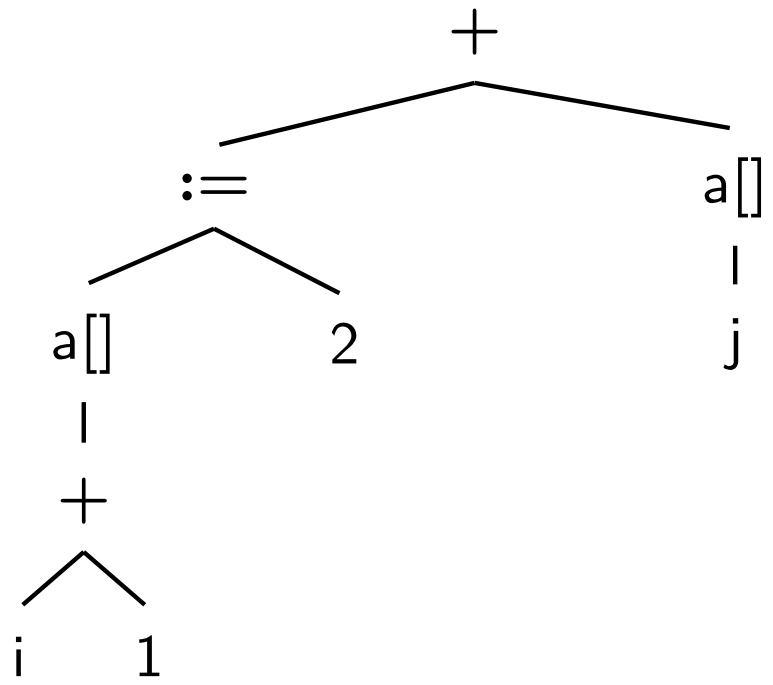



P-code generation: arrays (1): op

```
void genCode (SyntaxTree t, int isAddr)  {
  char codestr[CODESIZE];
  /* CODESIZE = max length of 1 line of P-code */
  if (t != NULL) {
    switch (t->kind) {
    case OpKind:
      { switch (t->op) {
        case Plus:
          if (isAddress) emitCode("Error");   // new check
          else {                              // unchanged
            genCode(t->lchild,FALSE);
            genCode(t->rchild,FALSE);
            emitCode("adi");                  // addition
          }
          break;
        case Assign:
          genCode(t->lchild,TRUE);           //``l-value''
          genCode(t->rchild,FALSE);          //``r-value''
          emitCode("stn");
          break
```

P-code generation: arrays (2): "subs"

- new code, of course

```
case Subs:
  sprintf(codestring,"%s %s", "lda",t->strval);
  emitCode(codestring);
  genCode(t->lchild, FALSE);
  sprintf(codestring,"%s %s %s",
          "ixa elem_size(", t->strval,")");
  emitCode(codestring);
  if (!isAddr) emitCode("ind 0");  // indirect load
  break;
default:
  emitCode("Error");
  break;
}
```

P-code generation: arrays (3): constants and identifiers

```
        case ConstKind:
          if (isAddr) emitCode("Error");
          else {
            sprintf(codestr,"%s %s","lds",t->strval);
            emitCode(codestr);
          }
          break;
        case IdKind:
          if (isAddr)
            sprintf(codestr,"%s %s", "lda",t->strval);
          else
            sprintf(codestr,"%s %s", "lod",t->strval);
          emitCode(codestr);
          break;
        default:
          emitCode("Error");
          break;
        }
    }
}
```




Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types
Control

Access to records

```
typedef struct Rec {
  int i;
  char c;
  int j;
} Rec;
...

Rec x;
```

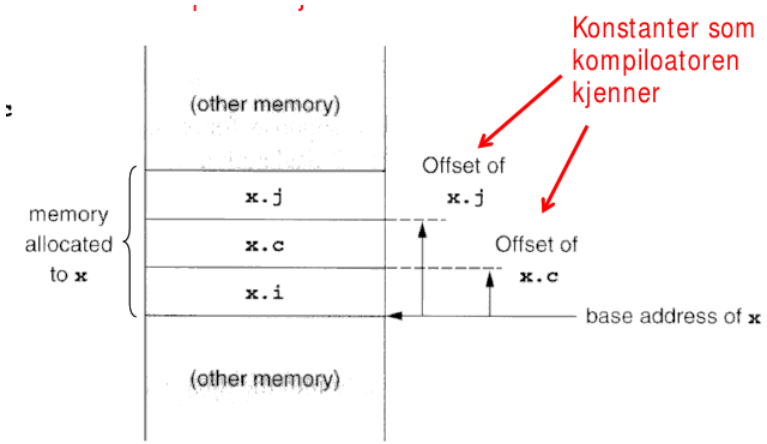

- fields with (statically known) offsets from base address
- note:
  - goal: intermediate code generation *platform independent*
  - another way of seeing it: it's still IR, not *final* machine code yet.
- thus: introduce function `field_offset(x,j)`
- calculates the offset.
- can be looked up (by the code-generator) in the *symbol table*

$\Rightarrow$ call replaced by actual off-set



INF5110 – Compiler Construction

Targets & Outline

Intro

Intermediate code

Three-address (intermediate) code

P-code

Generating P-code

Generation of three-address intermediate code

From P-code to 3A-Code and back: static simulation & macro expansion

More complex data types

Records/structs in 3AIC

- note: typically, records are implicitly references (as for objects)
- in (our version of a) 3AIC: we can just use `&x` and `*x`

simple record access `x.j`

```
t1 = &x +
field_offset(x,j)
```

left and right: `x.j := x.i`

```
t1  = &x + field_offset(x,j)
t2  = &x + field_offset(x,i)
*t1 = *t2
```



Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types
Control

Field selection and pointer indirection in 3AIC

```
p -> lchild = p;
p           = p->rchild;
```

```
typedef struct treeNode {
  int val;
  struct treeNode * lchild,
                  * rchild;
} treeNode
...

Treenode *p;
```

3AIC

```
t1  = p + field_offset(*p,lchild)
*t1 = p
t2  = p + field_offset(*p,rchild)
p   = *t2
```



Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types
Control

Structs and pointers in P-code

- basically same basic "trick"
- make use of `field_offset(x,j)`

```
p -> lchild = p;
p           = p->rchild;
```

```
lod p
ldc field_offset(*p, lchild)
ixa 1
lod p
sto
lda p
lod p
ind field_offset(*p, rchild)
sto
```



Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types
Control



Section

Control statements and logical expressions

Chapter 9 “Intermediate code generation”
Course “Compiler Construction”
Martin Steffen
Spring 2023

Control statements

- so far: basically *straight-line code*
- general (intra-procedural) control more complex thanks to *control-statements*
  - conditionals, switch/case
  - loops (while, repeat, for ...)
  - breaks, gotos, exceptions ...

important "technical" device: labels

- symbolic representation of addresses in static memory
- specifically named (= labelled) control flow points
- nodes in the *control flow graph*

- generation of labels (cf. also temporaries)



Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types
Control

Loops and conditionals: linear code arrangement


$$
\begin{array}{rcl}
\mathit{if\text{-}stmt} & \rightarrow & \textbf{if}\,(\,\mathit{exp}\,)\,\mathit{stmt}\;\;\textbf{else}\;\;\mathit{stmt} \\
\mathit{while\text{-}stmt} & \rightarrow & \textbf{while}\,(\,\mathit{exp}\,)\,\mathit{stmt}
\end{array}
$$


- challenge:
  - high-level syntax (AST) well-structured (= tree) which implicitly (via its structure) determines complex control-flow beyond SLC
  - low-level syntax (3AIC/P-code): rather flat, linear structure, ultimately just a *sequence* of commands



Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types
Control

Arrangement of code blocks and cond. jumps

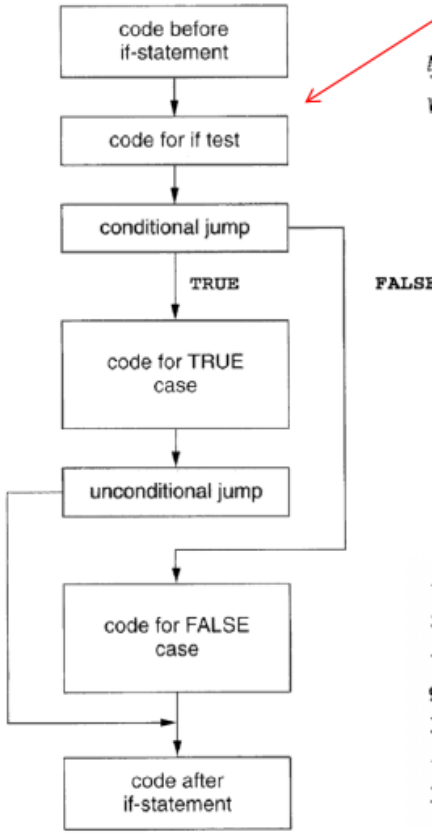

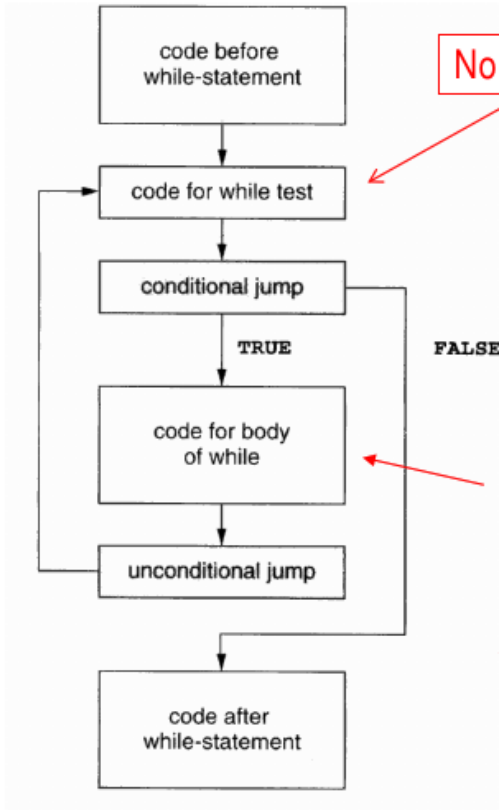

Jumps and labels: conditionals

$$\textbf{if } E \textbf{ then } S_1 \textbf{ else } S_2$$

3AIC for conditional

```
<code to eval E to t1>
if_false t1 goto L1          // goto false branch
<code for S1>                // fall through to true branch
goto L2                      // hop over false branch
label L1
<code for S2>
label L2
```

3 new op-codes:

- **ujp**: unconditional jump ("goto")
- **fjp**: jump on false
- **lab**: label (for pseudo instructions)



Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types

Jumps and labels: conditionals

$$\textbf{if } E \textbf{ then } S_1 \textbf{ else } S_2$$

P-code for conditional

```
<code to evaluate E>
fjp L1                    // got false branch
<code for S1>             // fall through to true branch
ujp L2                    // hop over false branch
lab L1
<code for S2>
lab L2
```

3 new op-codes:

- **ujp**: unconditional jump ("goto")
- **fjp**: jump on false
- **lab**: label (for pseudo instructions)



Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types

Jumps and labels: while



$$\textbf{while } E \textbf{ do } S$$

3AIC for while

```
label L1                          // label the loop header
<code to evaluate E to t1>
if_false t1 goto L2               // jump to after the loop
<code for S>
goto L1                           // jump back
label L2                          // label the loop exit
```

Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types

Jumps and labels: while



$$\textbf{while } E \textbf{ do } S$$

P-code for while

```
lab L1                          // label the loop header
<code to evaluate E>
fjp L2                          // jump to after the loop
<code for S>
ujp L1                          // jump back
lab L2                          // label the loop exit
```

Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types

Boolean expressions

- two alternatives for treatment
  1. as *ordinary* expressions
  2. via **short-circuiting**
- ultimate representation in HW:
  - no built-in booleans (HW is generally untyped)
  - but "arithmetic" $0, 1$ work equivalently & fast
  - bitwise ops which corresponds to logical $\wedge$ and $\vee$ etc
- comparison on "booleans": $0 < 1$?
- boolean values vs. jump conditions



Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types

Short circuiting boolean expressions

```
if ((p!=NULL) && p -> val==0)) ...
```

- done in C, for example
- semantics must *fix* evaluation order
- note: logically equivalent
  $a \wedge b = b \wedge a$
- cf. to conditional expressions/statements (also left-to-right)

```
lod x
ldc 0
neq      // x!=0 ?
fjp L1
// jump, if x=0
lod y
lod x
equ      //  x =? y
ujp L2   //
hop over
lab L1
ldc FALSE
lab L2
```

- new op-codes
  - **equ**
  - **neq**

$$a \textbf{ and } b \triangleq \textbf{if } a \textbf{ then } b \textbf{ else false}$$
$$a \textbf{ or } b \triangleq \textbf{if } a \textbf{ then true else } b$$



Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types

Grammar for loops and conditionals

$$
\begin{aligned}
\textit{stmt} &\rightarrow \textit{if-stmt} \mid \textit{while-stmt} \mid \textbf{break} \mid \textbf{other} \\
\textit{if-stmt} &\rightarrow \textbf{if}\,(\,\textit{exp}\,)\,\textit{stmt}\ \textbf{else}\ \textit{stmt} \\
\textit{while-stmt} &\rightarrow \textbf{while}\,(\,\textit{exp}\,)\,\textit{stmt} \\
\textit{exp} &\rightarrow \textbf{true} \mid \textbf{false}
\end{aligned}
$$

- note: simplistic expressions, only *true* and *false*

```
typedef enum {ExpKind, IfkInd, WhileKind,
              BreakKind, OtherKind} NodeKind;

typedef struct streenode {
  NodeKind kind;
  struct streenode * child[3];
  int val; /* used with ExpKind */
           /* used for true vs. false */
} STreeNode;


type STreeNode * SyntaxTree;
```



Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types

Translation to P-code

```
if (true) while (true) if (false) break else other
```

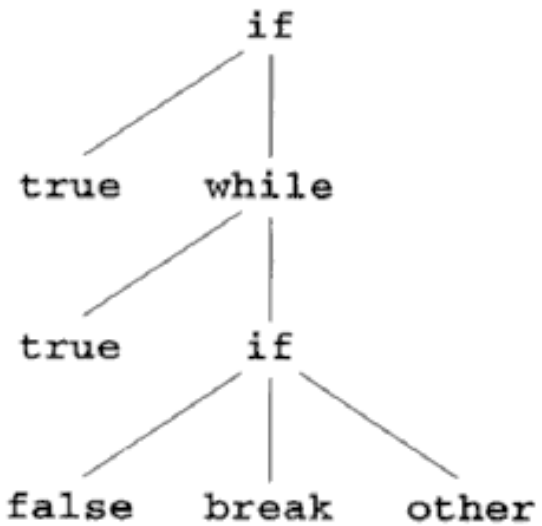


```
ldc true
fjp L1
lab L2
ldc true
fjp L3
ldc false
fjp L4
ujp L3
ujp L5
lab L4
Other
lab L5
ujp L2
lab L3
lab L1
```

Code generation

- extend/adapt `genCode`
- break statement:
  - absolute *jump* to *place afterwards*
  - *new argument*: label to jump-to when hitting a break
- assume: *label generator* `genLabel()`
- case for if-then-else
  - has to deal with one-armed if-then as well: test for NULL-ness
- side remark: control-flow graph (see also later)
  - labels can (also) be seen as *nodes* in the *control-flow graph*
  - `genCode` generates labels while traversing the AST

  $\Rightarrow$ implict generation of the CFG
  - also possible:
    - separately generate a CFG first
    - as (just another) IR
    - generate code from there



Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types

Code generation proc. for p-code

```
void genCode(SyntaxTree t, char* label) {
  char codestr[CODESIZE];
  char * lab1, * lab2;
  if (t != NULL) switch (t->kind) {
    case ExpKind:
      if (t->val==0)
          emitCode("ldc false");
      else emitCode("ldc true");
      break;
```



Targets & Outline

Intro

Intermediate code

Three-address (intermediate) code

P-code

Generating P-code

Generation of three-address intermediate code

From P-code to 3A-Code and back: static simulation & macro expansion

More complex data types

Code generation proc. for p-code

```
case IfKind:
  genCode(t->child[0],label);
  lab1 = genLabel();
  sprintf(codestr,"%s %s", "fjp", lab1);
  emitCode(codestr);
  genCode(t-child[1],label);
  if (t->child[2]!=NULL) {
    lab2 = genLabel();
    sprintf(codestr,"%s %s", "ujp", lab2);
    emitCode(codestr);
  }
  sprintf(codestr,"%s %s", "lab", lab1);
  emitCode(codestr);
  if (t->child[2]!=NULL) {
    genCode(t->child[2],label);
    sprintf(codestr,"%s %s", "lab", lab2);
    emitCode(codestr);
  }
  break;
```



Targets & Outline

Intro

Intermediate code

Three-address (intermediate) code

P-code

Generating P-code

Generation of three-address intermediate code

From P-code to 3A-Code and back: static simulation & macro expansion

More complex data types

Code generation proc. for p-code

```
case WhileKind:
  lab1 = genLabel();
  sprintf(codestr,"%s %s", "lab", lab1);
  emitCode(codestr);
  genCode(t->child[0],label);
  lab2 = genLabel();
  sprintf(codestr,"%s %s", "fjp", lab2);
  emitCode(codestr);
  genCode(t->child[1],label);
  sprintf(codestr,"%s %s", "ujp", lab1);
  emitCode(codestr);
  sprintf(codestr,"%s %s", "lab", lab2);
  emitCode(codestr);
  break;
```



Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types
Control

Code generation proc. for p-code

```
    case BreakKind:
      sprintf(codestr,"%s %s", "ujp", label);
      emitCode(codestr);
      break;
    case OtherKind:
      emitCode("Other");
      break;
    default:
      emitCode("Error");
      break;
    }
}
```



Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types

More on short-circuiting (now in 3AIC)

- boolean expressions contain only two (official) values: true and false
- as stated: boolean expressions are often treated special: via short-circuiting
- short-circuiting especially for boolean expressions in *conditionals* and *while*-loops and similar
  - treat boolean expressions *different* from ordinary expressions
  - avoid (if possible) to calculate boolean value "till the end"
- short-circuiting: specified in the language definition (or not)



Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types

Example for short-circuiting



Source

```
if a < b ||
   (c > d && e >= f)
then
  x = 8
else
  y = 5
endif
```

3AIC

```
t1 = a < b
if_true t1 goto 1 // short circuit
t2 = c > d
if_false goto 2
// short circuit
t3 = e >= f
if_false t3 goto 2
label 1
x = 8
goto 3
label 2
y = 5
label 3
```

Targets & Outline
Intro
Intermediate code
Three-address (intermediate) code
P-code
Generating P-code
Generation of three-address intermediate code
From P-code to 3A-Code and back: static simulation & macro expansion
More complex data types

Code generation for conditional (short circuit)

```
case IfKind:
  lab_t = genLabel();
  lab_f = genLabel();
  genBoolCode(t->child[0],lab_t,lab_f);    // boolean condition
  sprintf(codestr,"%s %s", "lab", lab_t); // if-branch
  emitCode(codestr);
  genCode(t->child[1],label);
  lab_x = genLabel();
  if (t->child[2]!=NULL) {                 // does there exists an
    sprintf(codestr,"%s %s", "ujp", lab_x);
    emitCode(codestr);
  }
  sprintf(codestr,"%s %s", "lab", lab_f); // else-branch
  emitCode(codestr);
  if (t->child[2]!=NULL) {                 // does there exists an
    genCode(t->child[2],label);
    sprintf(codestr,"%s %s", "lab", lab_x);// post-statement labe
    emitCode(codestr);
  }
  break;
case WhileKind:
```

Code generation for bools (short circuit)

```
void genBoolCode (string lab_t, lab_f) =
  ...
  switch ... {
    case "||" : {
      String lab_x = genLabel();
      left.genBoolCode(lab_t, lab_x);
      sprintf(codestr,"%s %s", "lab", lab_x);
      emitCode(codestr);
      right.genBoolCode(lab_t, lab_f);
    }

    case "&&" : {
      String lab_x = genLabel();
      left.genBoolCode(lab_x, lab_f);
      sprintf(codestr,"%s %s", "lab", lab_x);
      emitCode(codestr);
      right.genBoolCode(lab_t, lab_f);
    }

    case "not" : {  // here just a left tree
      left.genBoolCode(lab_f, lab_t);
    }

    case "<" : {              // example for a binary relation
      String t_1, t_2, t_3; //
      t_1 = left.genIntCode();
```

Or case

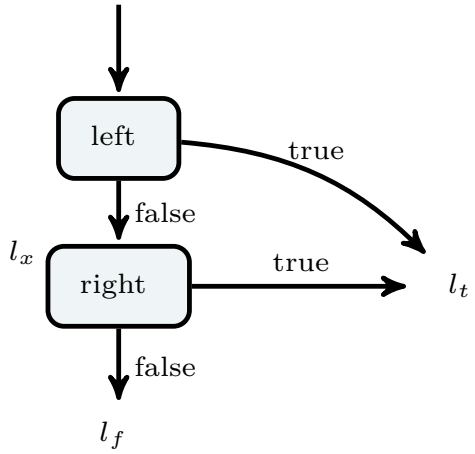


Figure: Short circuiting booleans, case "or"

References I



Bibliography

Targets & Outline

Intro

Intermediate code

Three-address (intermediate) code

P-code

Generating P-code

Generation of three-address intermediate code

From P-code to 3A-Code and back: static simulation & macro expansion

More complex data types

Control